






PT. AREZDA PURNAMA LOKA

Pressure Vessels & Sealing Technology Products Manufacturing

INDUSTRIAL INSULATION

Mineral Fiber (Rock Wool)

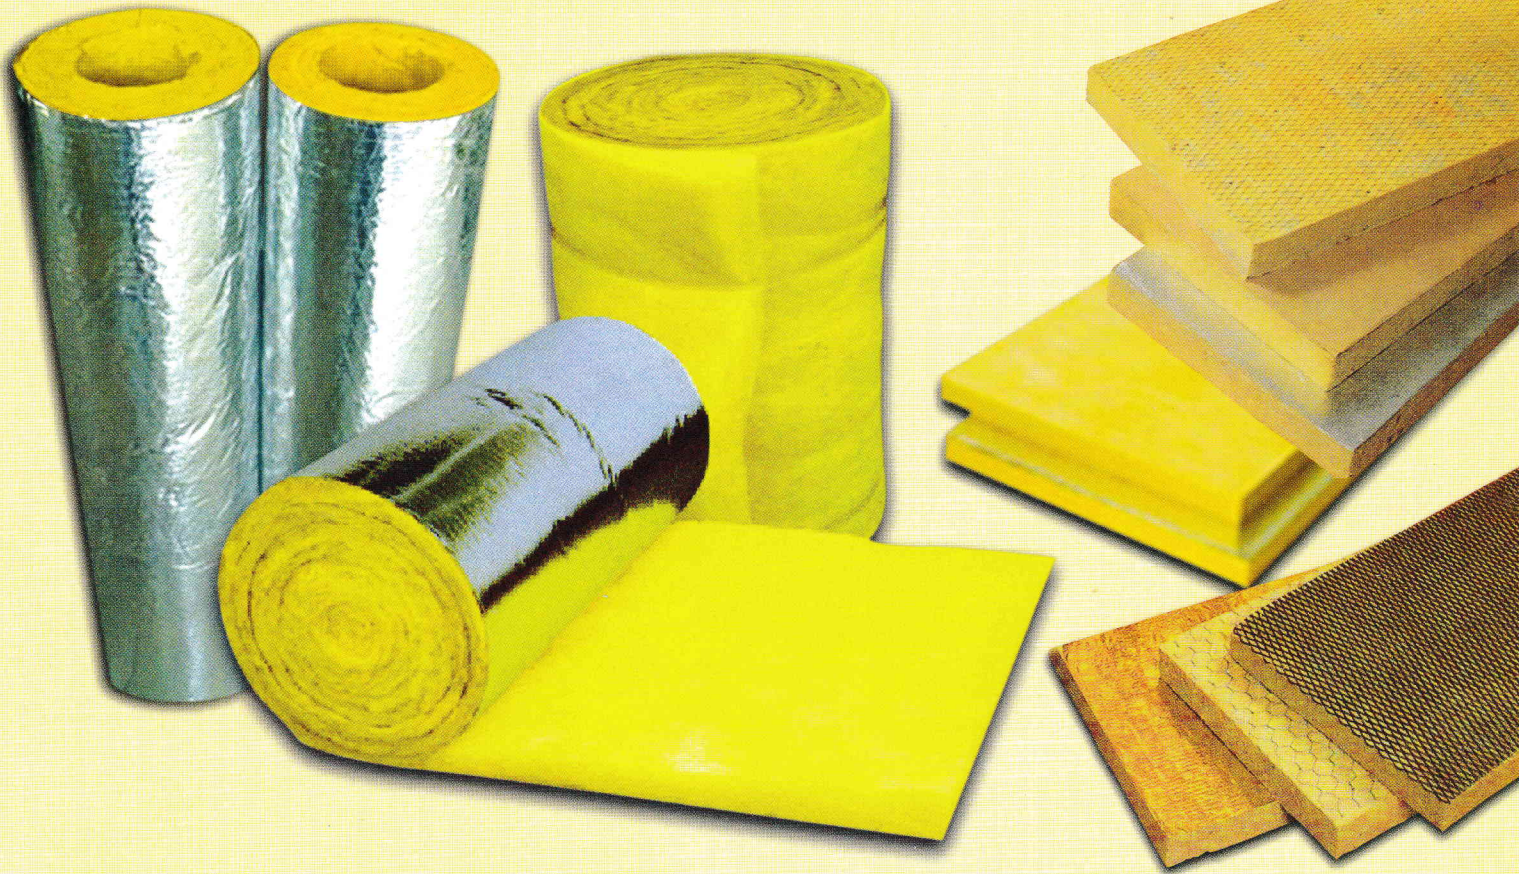


www.arezda.co.id



Produksi Dalam Negeri

MINERAL FIBER (ROCK WOOL)

Aplikasi	Densitas	Ketebalan Yang Dianjurkan
Tangki Air, Peralatan Pendingin	60 kg/m ²	75 mm
Tangki Minyak, Refrigerasi Air, Bengkel Kedap Suara	80 kg/m ²	100 mm
Boiler, Tangki Penampungan, Pintu Tahan Api	100 kg/m ²	50 mm
Pemanas, Pengering, Dapur Pengecoran Aluminium / Gelas	140 kg/m ²	100 mm
AC, Tangki Tertutup	180 kg/m ²	100 mm
Penekanan Suhu Panas, Dapur Pengecoran, Peralatan Penyekat Panas	200 kg/m ²	75 mm
Turbin, Struktur Logam, Saluran	120 kg/m ²	65 mm
Pipa Minyak, Pipa Uap	150 kg/m ²	75 mm

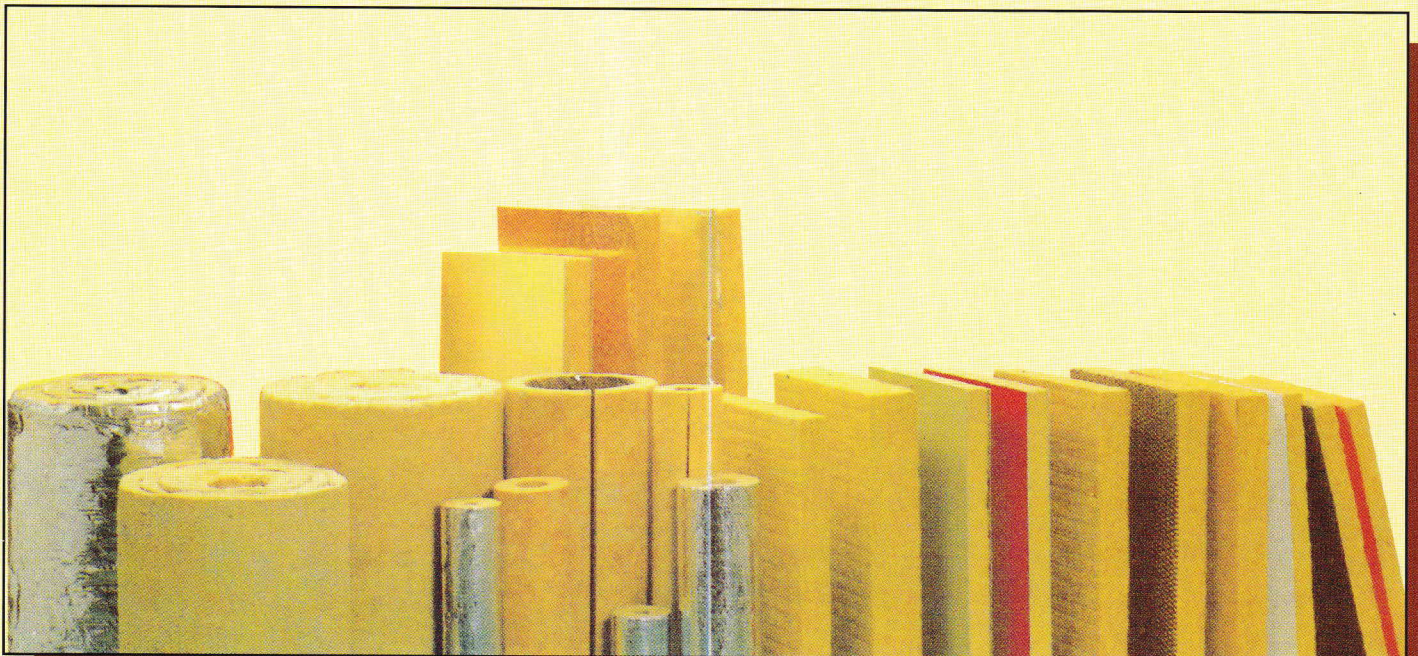

INGI - 0159 BLANKET

DATA TEKNIS

Keterangan	L.D.	H.D.
Densitas	80 kg/m ²	120 kg/m ²
Suhu Pemakaian	750°C	750°C
Konduktivitas Panas	0,060 Kkal/m.h.°C	0,056 Kkal/m.h.°C
Ukuran Thickness x Width x Length	25 mm x 1 m x 5 m 75 mm x 1 m x 3,3 m	25 mm x 1 m x 10 m

BLANKET

Insulasi Rockwool Blanket Fleksibel dengan satu permukaan dilapisi Wire Mesh digunakan untuk Valve, Sambungan, Pipa Besar, Tangki Penyimpanan, Permukaan Boiler yang bulat atau lengkung.




INGI - 0158 FELT

DATA TEKNIS

Keterangan	L.D.	H.D.
Densitas	60 - 140 kg/m ²	150 - 200 kg/m ²
Suhu Pemakaian	750°C	750°C
Konduktivitas Panas	0,059 Kkal/m.h.°C	0,056 Kkal/m.h.°C
Ukuran Thickness x Width x Length	25 mm x 0,5 m x 1 m 50 mm x 0,5 m x 1 m 75 mm x 0,5 m x 1 m 100 mm x 0,5 m x 1 m	25 mm x 0,5 m x 1 m 50 mm x 0,5 m x 1 m 75 mm x 0,5 m x 1 m 100 mm x 0,5 m x 1 m

FELT

Insulasi Blanket Fleksibel terbuat dari Rockwool dengan perekat Resin Fenol permukaannya dapat dilapisi Aluminium Foil, Wire Mesh atau Kraft Paper, digunakan untuk Peralatan Pemanas, Tangki Penyimpanan, Peralatan Pengering.

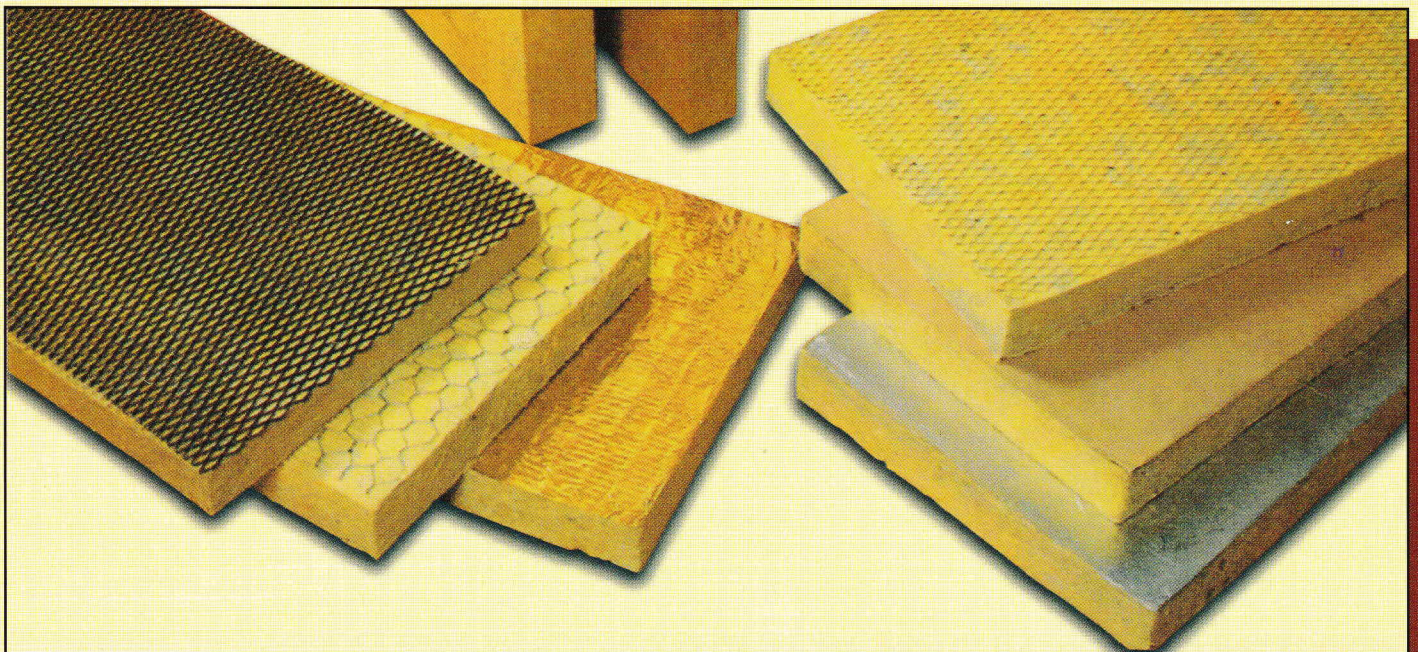

INGI - 0157 PIPE COVER, LAMELLA MATS

DATA TEKNIS


Keterangan	Sectional Pipe Cover	Lamella Mats
Densitas	150 kg/m ²	110 kg/m ²
Suhu Pemakaian	750°C	750°C
Konduktivitas Panas	0,056 Kkal/m.h.°C	0,054 Kkal/m.h.°C
Ukuran Ø x Width x Length	Ø 1/8" - 12" x 1 M x 25 mm, 30 mm, 40 mm, 50 mm, 65 mm, 75 mm	Ø 14" ke atas x 1 M x 25 mm, 30 mm, 40 mm, 50 mm, 65 mm, 75 mm

PIPE COVER


Pembungkus Pipa terbuat dari Rockwool dengan perekat Resin Fenol, permukaannya dapat dilapisi Aluminium Foil, dipergunakan untuk semua tipe Pipa Pemanas atau Pendingin di berbagai industri.




Thermal Conductivity by Density

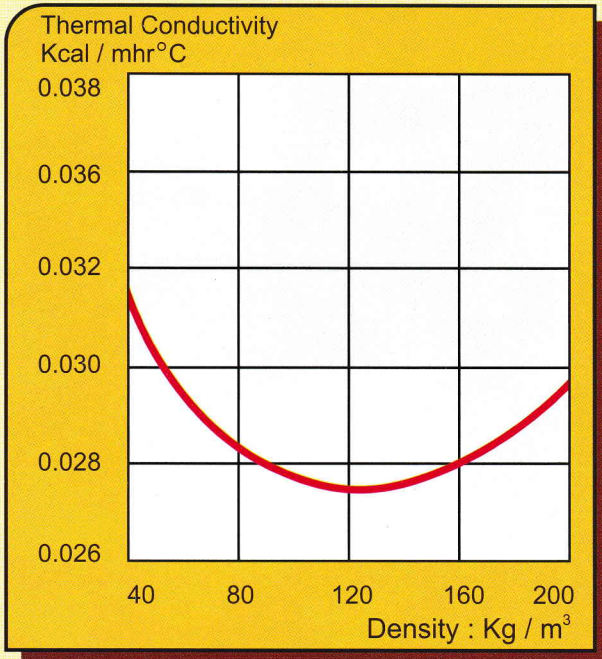


Compression by Density

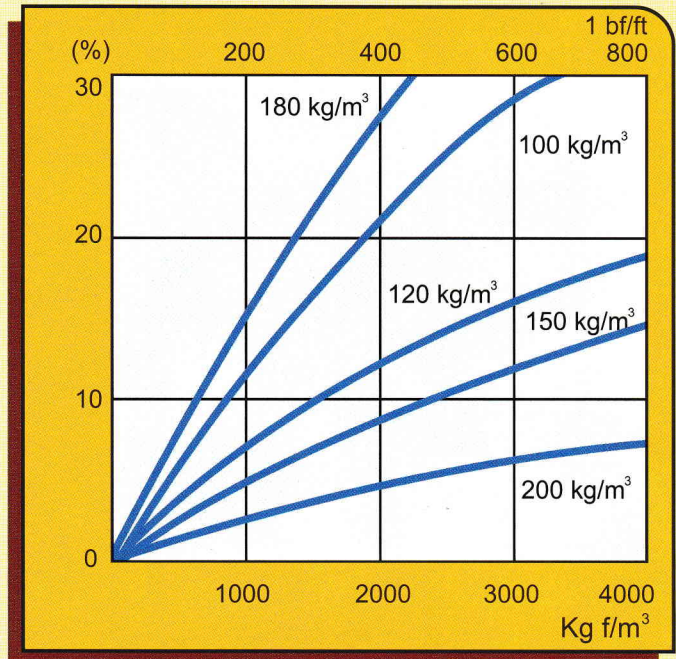

Sound Absorption

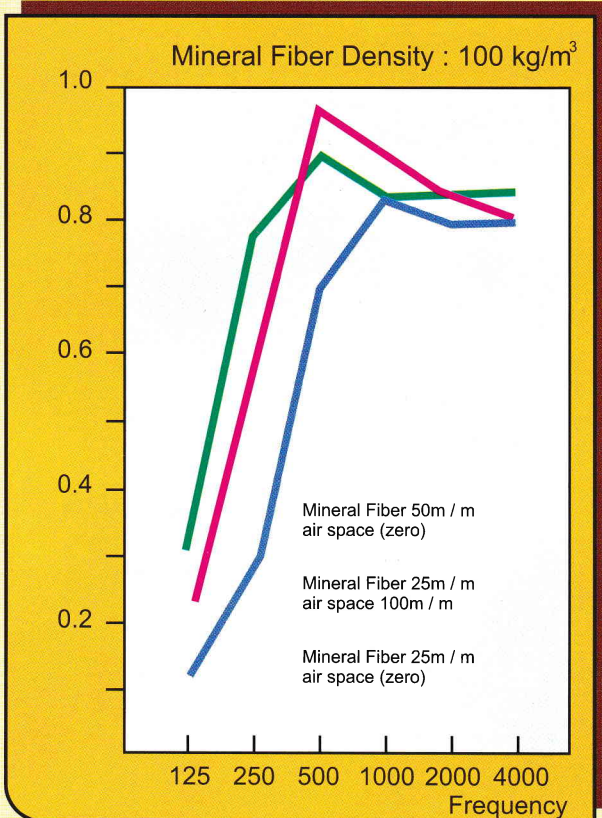

Standard Fire Curve

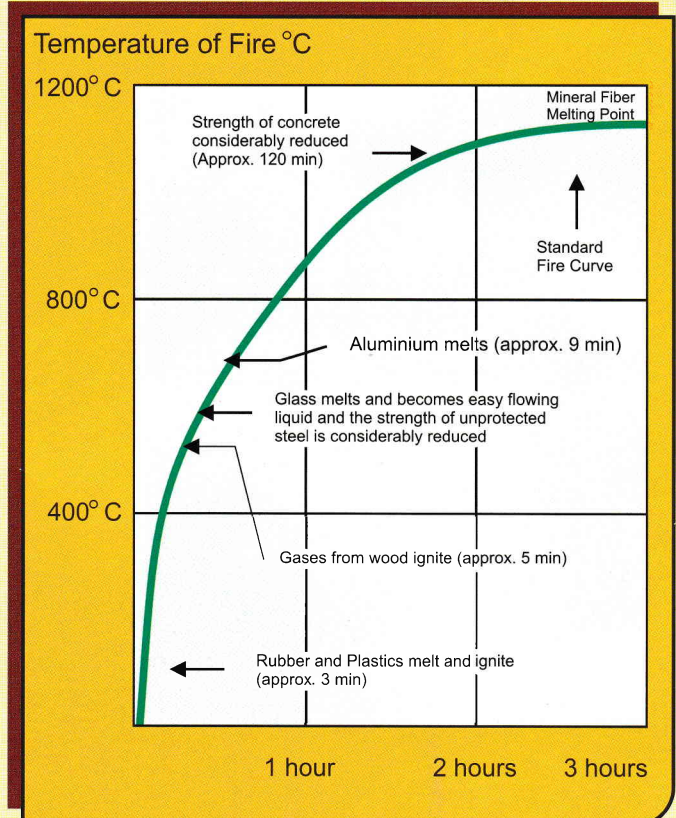

PT. AREZDA PURNAMA LOKA

Jl. Mangga Besar Raya 2-Q

Jakarta Barat 11160 Indonesia

Tel: (62-21) 6297243, 6390224 Fax: (62-21) 6498978

Web: www.arezda.co.id

Email: info@arezda.co.id, ingi@arezdagasket.com

Branches/Reps./Agents : ■ Balikpapan ■ Balongan ■ Bandung ■ Bontang ■ Cilacap ■ Cilegon ■ Cirebon ■ Dumai
 ■ Gresik ■ Lhokseumawe ■ Medan ■ Palembang ■ Pangkalan Brandan ■ Pekanbaru ■ Semarang ■ Sorong-Irja ■ Surabaya